


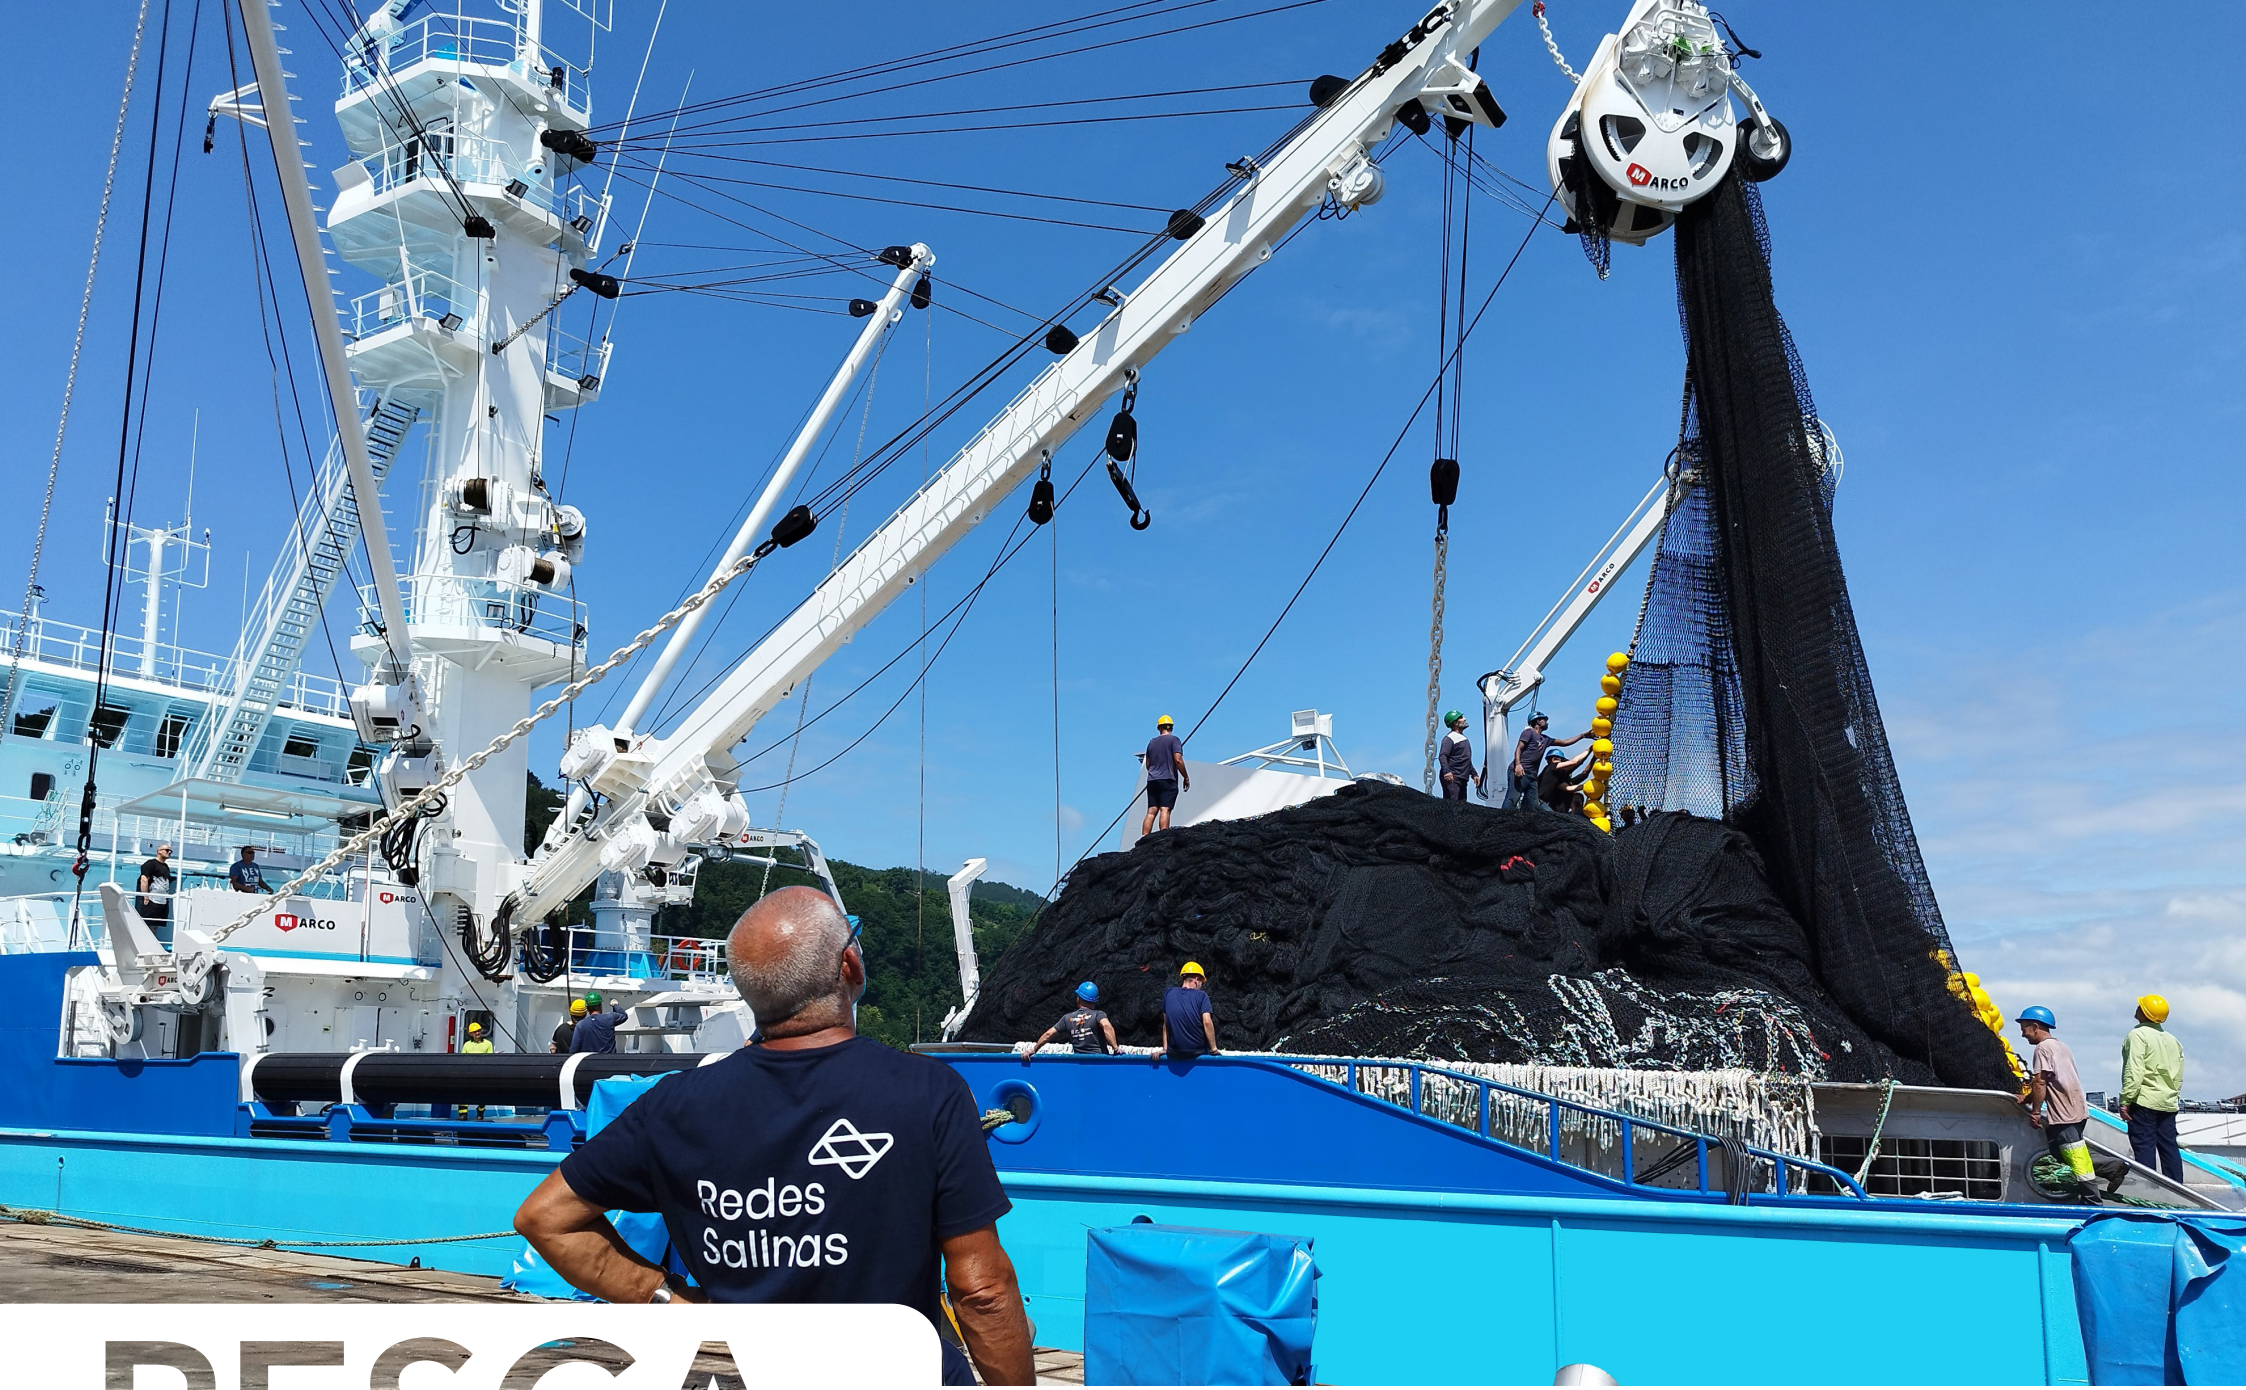


PESCA


# REDES DE PESCA

## FISHING NETS

Las redes de pesca son herramientas esenciales en la industria pesquera y desempeñan un papel crucial en la captura de peces. Redes Salinas fabrica redes elaboradas con materiales resistentes y diseñadas específicamente para diferentes tipos de pesca (cerco, arrastre, artes fijos...). Sin embargo, es fundamental que su uso se realice de manera sostenible y responsable, ya que las redes de pesca pueden tener un impacto significativo en los ecosistemas marinos si no se gestionan adecuadamente. En Redes Salinas apostamos por una regulación y supervisión adecuada para preservar los recursos marinos y mantener la salud de los ecosistemas acuáticos a largo plazo.

*Fishing nets are essential tools in the fishing industry and play a crucial role in catching fish. Redes Salinas manufactures nets made with resistant materials and designed specifically for different types of fishing (purse seining, trawling, fixed gear...). However, it is essential that their use is carried out in a sustainable and responsible manner, as fishing nets can have a significant impact on marine ecosystems if they are not managed properly. At Redes Salinas we are committed to adequate regulation and supervision to preserve marine resources and maintain the health of aquatic ecosystems in the long term.*

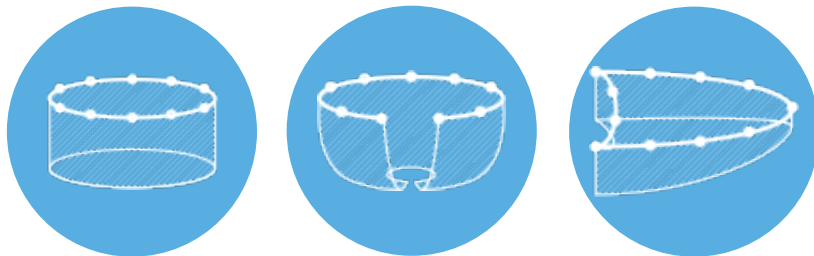

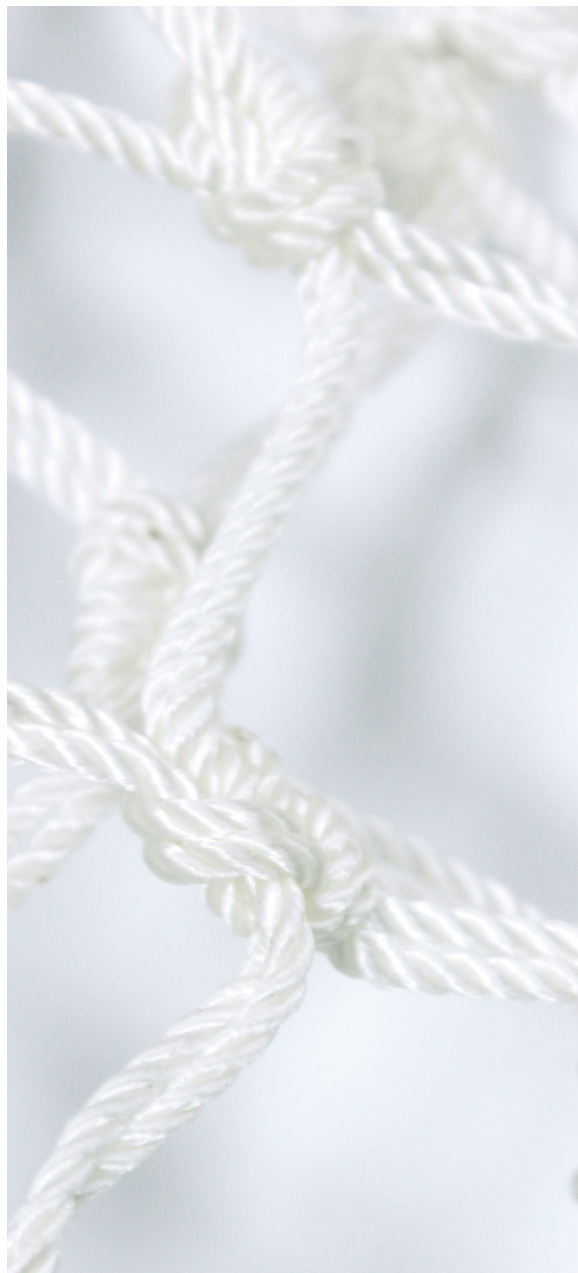


## NYLON TORCIDO

*TWISTED POLYAMIDE*



| TWINE SIZE | 210/24 | 210/30 | 210/36 | 210/42 | 210/48 | 210/60 | 210/72 | 210/78 |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|
| MTS KGS    | 1612   | 1234   | 990    | 900    | 714    | 562    | 497    | 450    |
| B.S.       | 40     | 49     | 61     | 66     | 80     | 88     | 110    | 112    |

| TWINE SIZE | 210/84 | 210/96 | 210/120 | 210/132 | 210/144 | 210/180 | 210/240 |
|------------|--------|--------|---------|---------|---------|---------|---------|
| MTS KGS    | 426    | 369    | 277     | 264     | 250     | 183     | 144     |
| B.S.       | 114    | 125    | 180     | 200     | 210     | 235     | 290     |

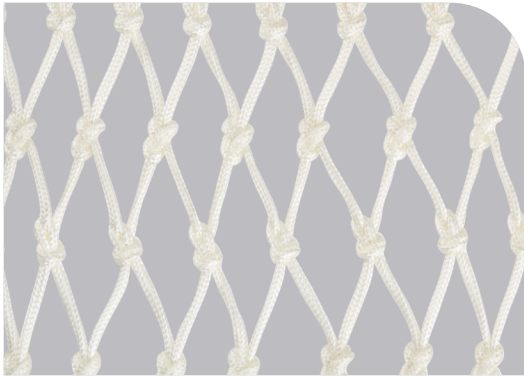

## NYLON TRENZADO

*BRAIDED POLYAMIDE*




|               |             |             |               |                   |                 |               |                   |                 |               |                  |
|---------------|-------------|-------------|---------------|-------------------|-----------------|---------------|-------------------|-----------------|---------------|------------------|
| TWINE<br>SIZE | 8842<br>#24 | 8843<br>#36 | 4840/3<br>#42 | 4840/3,1/4<br>#48 | 4840/3,5<br>#54 | 4840/4<br>#60 | 4840/4,1/4<br>#72 | 4840/4,5<br>#84 | 4840/5<br>#96 | 4840/5,5<br>#120 |
| MTS<br>KGS    | 595         | 397         | 270           | 235               | 221             | 180           | 156               | 125             | 103           | 86               |
| B.S.          | 100         | 130         | 196           | 230               | 250             | 275           | 317               | 380             | 450           | 520              |

|               |                   |                |                  |                |                |                |                 |                 |                 |                 |
|---------------|-------------------|----------------|------------------|----------------|----------------|----------------|-----------------|-----------------|-----------------|-----------------|
| TWINE<br>SIZE | 4840/5,75<br>#132 | 4840/6<br>#144 | 4840/6,5<br>#168 | 4840/7<br>#190 | 4840/8<br>#210 | 4840/9<br>#250 | 4840/10<br>#300 | 4840/11<br>#325 | 4840/12<br>#350 | 4840/14<br>#400 |
| MTS<br>KGS    | 81                | 79             | 64               | 55             | 47             | 39             | 33              | 29              | 26              | 20              |
| B.S.          | 603               | 610            | 735              | 790            | 1083           | 1170           | 1252            | 1602            | 1640            | 1815            |






POLIETILENO TORCIDO  
*TWISTED POLYETHYLENE*

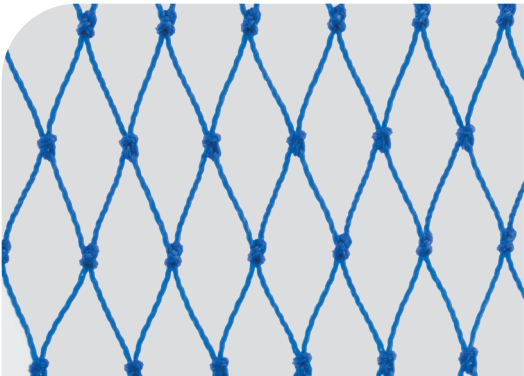


| TWINE SIZE | 3/4  | 3/5  | 3/6 | 3/7 | 3/8 | 3/9 | 3/10 | 3/11 | 3/13 | 3/14 | 3/18 | 3/20 |
|------------|------|------|-----|-----|-----|-----|------|------|------|------|------|------|
| MTS KGS    | 1266 | 1010 | 847 | 729 | 607 | 565 | 500  | 485  | 401  | 361  | 271  | 228  |
| B.S.       | 37   | 46   | 57  | 76  | 86  | 96  | 100  | 106  | 120  | 125  | 130  | 140  |

POLIETILENO TRENZADO  
*BRAIDED POLYETHYLENE*

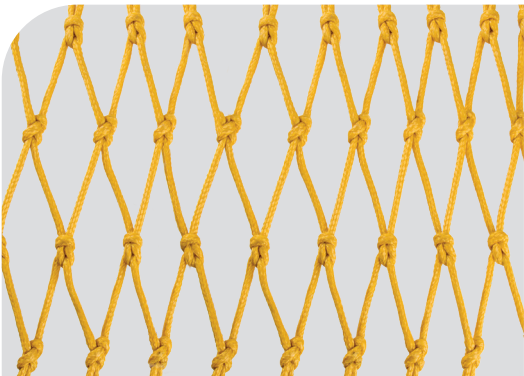


| TWINE SIZE mm | 1,8 | 2,0 | 2,5 | 3,0 | 3,5 | 4,0 | 4,5 | 5,0 | 5,5 | 6,0 | 7,0 | 8,0 | 10  |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| MTS KGS       | 571 | 490 | 430 | 266 | 240 | 193 | 157 | 110 | 96  | 88  | 78  | 72  | 64  |
| B.S.          | 62  | 70  | 94  | 120 | 156 | 166 | 152 | 290 | 320 | 360 | 445 | 634 | 710 |

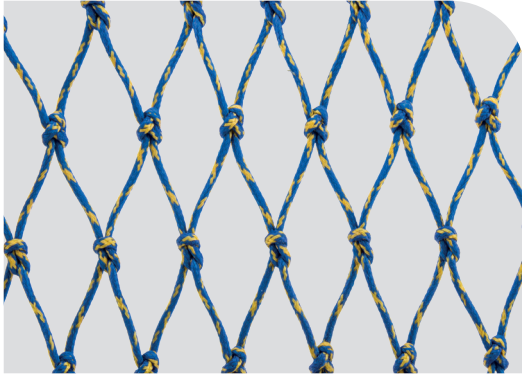

## POLYMAX TRENZADO (HDPE)

*BRAIDED POLYMAX (HDPE)*

| TWINE<br>SIZE mm | 1,8 | 2,0 | 2,5 | 3,0 | 3,5 | 4,0 | 4,5 | 5,0 | 5,5 | 6,0 | 7,0 | 8,0 |
|------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| MTS<br>KGS       | 544 | 411 | 300 | 204 | 172 | 132 | 120 | 92  | 75  | 65  | 56  | 47  |
| B.S.             | 67  | 103 | 135 | 207 | 228 | 306 | 386 | 520 | 618 | 725 | 855 | 949 |

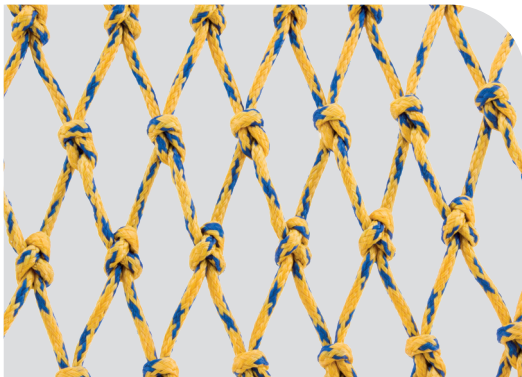

## POLYMAX ULTRA TRENZADO (HDPE)

*BRAIDED POLYMAX ULTRA (HDPE)*


| TWINE<br>SIZE mm | 1,8 | 2,0 | 2,5 | 3,0 | 3,5 | 4,0 | 4,5 | 5,0 | 5,5 | 6,0 | 7,0 | 8,0  |
|------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| MTS<br>KGS       | 544 | 411 | 300 | 204 | 172 | 132 | 120 | 92  | 75  | 65  | 56  | 47   |
| B.S.             | 75  | 116 | 164 | 235 | 285 | 382 | 432 | 549 | 695 | 790 | 940 | 1076 |





## HDPE COMPACTO


*COMPACT HDPE*

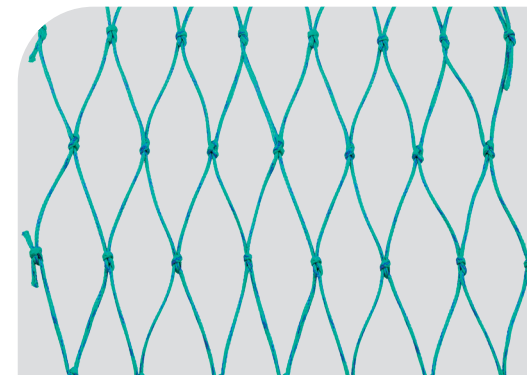

| TWINE<br>SIZE mm | 3,0 | 4,0 | 5,0 | 5,5 | 6,0 |
|------------------|-----|-----|-----|-----|-----|
| MTS<br>KGS       | 243 | 155 | 98  | 80  | 63  |
| B.S.             | 158 | 230 | 330 | 370 | 525 |

## HDPE SEMI COMPACTO

*SEMI COMPACT HDPE*

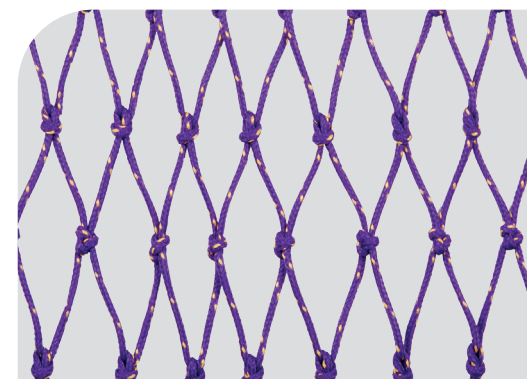

| TWINE<br>SIZE mm | 4,0 | 5,5 |
|------------------|-----|-----|
| MTS<br>KGS       | 232 | 140 |
| B.S.             | 130 | 256 |





## CUERDAS NYLON ALTA TENACIDAD 3 CABOS

### 3 STRAND HIGH TENACITY NYLON ROPES

| DIÁMETRO / SIZE |         | PESO / WEIGHT |            | TENACIDAD MEDIA<br>AVERAGE STRENGTH |         |
|-----------------|---------|---------------|------------|-------------------------------------|---------|
| MM              | INCH    | KG/100 MT     | LBS/100 FT | KGS                                 | LBS     |
| 11              | 7/16"   | 7,3           | 4,9        | 2.390                               | 5.269   |
| 12              | 1/2"    | 9,8           | 6,6        | 3.150                               | 6.944   |
| 14              | 9/16"   | 12,2          | 8,2        | 3.950                               | 8.708   |
| 16              | 5/8"    | 15,4          | 10,4       | 5.038                               | 11.107  |
| 18              | 3/4"    | 21,7          | 14,7       | 6.793                               | 14.976  |
| 20              | 13/16"  | 25,4          | 17,2       | 7.712                               | 17.002  |
| 22              | 7/8"    | 29,7          | 20,1       | 9.575                               | 21.109  |
| 24              | 1"      | 39            | 26,4       | 12.470                              | 27.491  |
| 26              | 1-1/16" | 43            | 29,1       | 13.680                              | 30.159  |
| 28              | 1-1/8"  | 50,7          | 34,3       | 16.150                              | 35.604  |
| 30              | 1-1/4"  | 59            | 39,9       | 18.930                              | 41.733  |
| 32              | 1-5/16" | 67,2          | 45,4       | 20.905                              | 46.087  |
| 36              | 1-1/2"  | 82            | 55,4       | 26.201                              | 57.763  |
| 40              | 1-5/8"  | 99,1          | 67,0       | 31.749                              | 69.994  |
| 44              | 1-3/4"  | 123,6         | 83,5       | 39.320                              | 86.685  |
| 48              | 2"      | 141,5         | 95,6       | 44.858                              | 98.894  |
| 52              | 2-1/8"  | 162,3         | 109,7      | 50.802                              | 111.998 |
| 56              | 2-1/4"  | 192,2         | 129,9      | 60.955                              | 134.381 |
| 60              | 2-1/2"  | 221,8         | 149,9      | 68.005                              | 149.924 |

Disponibles hasta 60 mm Ø. Available up to 60 mm Ø.

Valores aproximados / Approximate values

## CUERDAS NYLON TRENZADAS

### BRAIDED NYLON ROPES

| DIÁMETRO / SIZE |         | PESO / WEIGHT |            | TENACIDAD MEDIA<br>AVERAGE STRENGTH |         |
|-----------------|---------|---------------|------------|-------------------------------------|---------|
| MM              | INCH    | KG/100 MT     | LBS/100 FT | KGS                                 | LBS     |
| 18              | 3/4"    | 22,5          | 15,2       | 8.301                               | 18.300  |
| 22              | 7/8"    | 33,7          | 22,8       | 12.474                              | 27.500  |
| 24              | 1"      | 39,0          | 26,4       | 14.629                              | 32.250  |
| 28              | 1-1/8"  | 50,1          | 33,9       | 18.768                              | 41.375  |
| 30              | 1-1/4"  | 58,0          | 39,2       | 21.920                              | 48.325  |
| 32              | 1-5/16" | 67,2          | 45,4       | 24.993                              | 55.100  |
| 36              | 1-1/2"  | 83,7          | 56,6       | 31.412                              | 69.250  |
| 40              | 1-5/8"  | 100,7         | 68,0       | 37.581                              | 82.850  |
| 44              | 1-3/4"  | 117,5         | 79,4       | 43.795                              | 96.550  |
| 48              | 2"      | 142,4         | 96,2       | 53.116                              | 117.100 |
| 52              | 2-1/8"  | 168,0         | 113,5      | 62.710                              | 138.250 |
| 56              | 2-1/4"  | 200,8         | 135,7      | 75.320                              | 166.050 |
| 60              | 2-1/2"  | 225,0         | 152,0      | 84.324                              | 185.900 |

Disponibles hasta 60 mm Ø. Available up to 60 mm Ø.

Valores aproximados / Approximate values









Redes Salinas, S.A.  
Carretera Callosa - Catral, 30  
03360 Callosa de Segura, Alicante, España  
Tel: 96 531 04 08 / 96 531 03 54  
redessalinas@redessalinas.com

[www.redessalinas.com](http://www.redessalinas.com)